


SPECIFICATION SHEET

SD-XXXX Rectangular, 3-wire Floating Point Motorized Auxiliary Zone Control Dampers

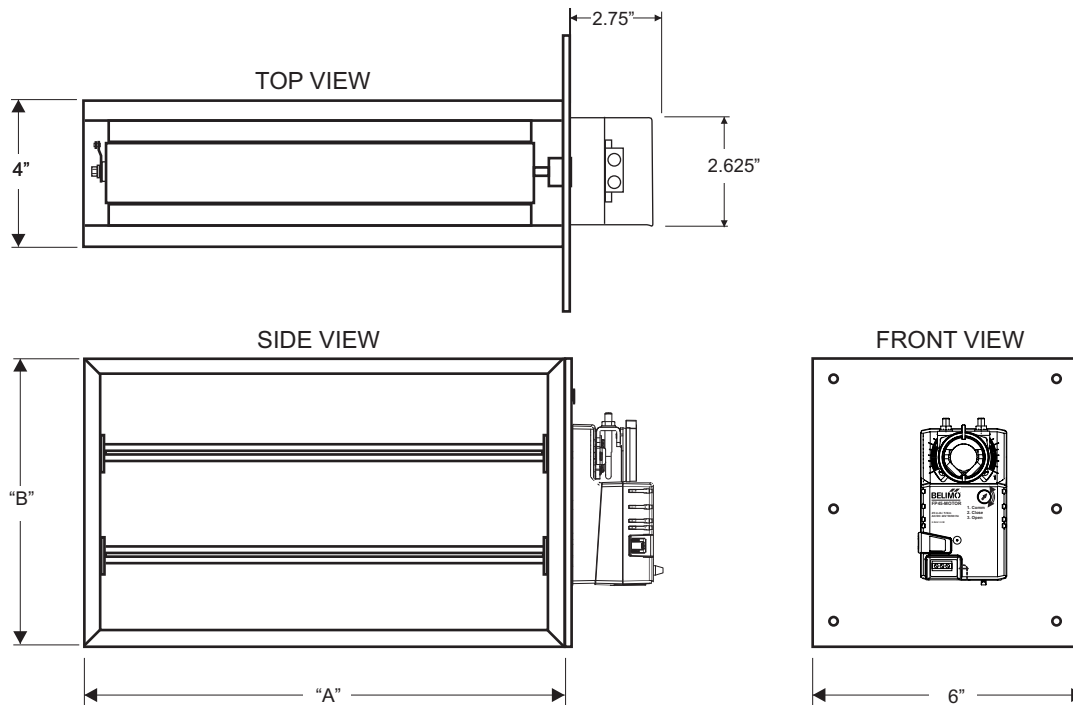

SPECIFICATIONS

DIMENSIONS:

Damper models SD-XXXX are sized width (A) by height (B) with actuator on the (B) dimension.
Bottom mount models SD-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension.
Actual (A) and (B) dimensions are undercut 1/4".
Standard sizes range from 8" x 8" up to 36" x 24" in 2" increments.

APPLICATION:

The model SD-XXXX is a round commercial auxiliary zone control damper assembly that includes a damper and modulating actuator. The SD-XXXX zone damper can be used as an auxiliary damper when wired to a ZD damper actuator in applications where more than one damper is required in a single zone.

CONSTRUCTION:

- 1/16" extruded aluminum frame
- 1/16" extruded aluminum parallel blades
- 1/16" aluminum mounting flange
- Nylon bushings
- Minimum position adjustment

ELECTRICAL:

- 24 Volt, 2.5 VA
- 3-Wire
- 90 second timing
- 45 lb.-in.

Drawings are intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.
iO HVAC Controls reserves the right to make product changes without notification or obligation.



Indianapolis, IN 46237

www.iohvaccontrols.com
For Technical Support Call Toll Free: 866-225-5032

iO-08-1379-062524