





OAD-XX-MOD

Specification Sheet

Modulating Fresh Air Intake Damper

Used in retrofit and new construction applications

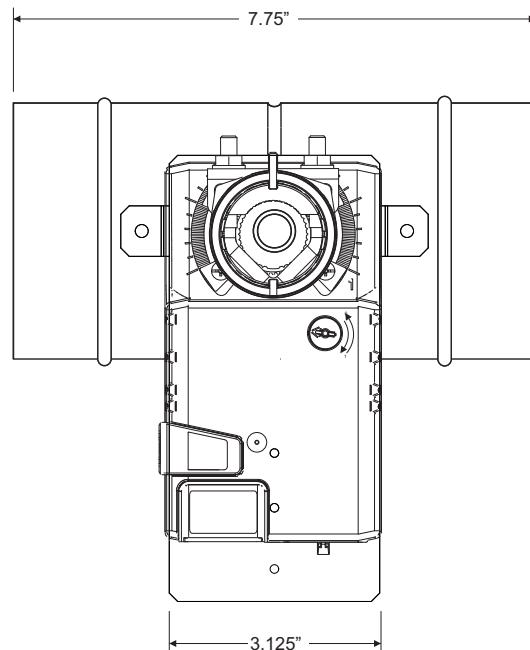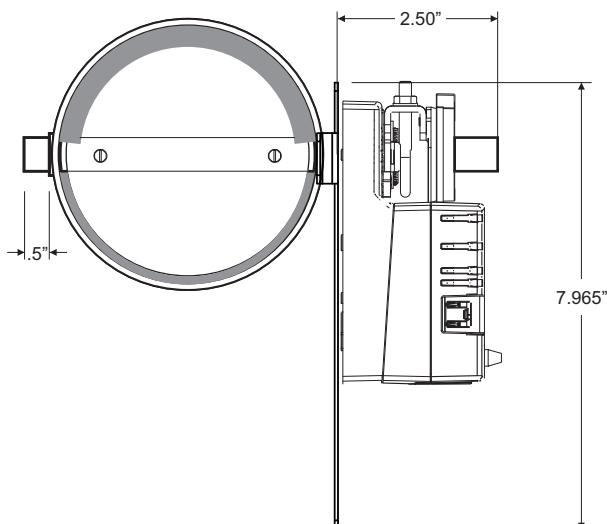

The OAD-XX-MOD is designed for retrofit or new construction applications requiring exhaust, fresh air intake, and zone control applications. Typical application use includes bathrooms/restrooms and individual rooms in high rise hotels, office buildings and apartment buildings. The damper is equipped with a 2-10 V (4-20 mA) modulating actuator.

DAMPER SPECIFICATIONS:

Available Sizes:	6", 8", 10", 12", 14", 16", 18"
Damper Shell:	20 gauge galvanized steel
Actuator Bracket:	18 gauge galvanized steel
Damper Blade:	22 gauge galvanized steel
Shaft:	1/2" aluminum
Body Length:	8"
Gasket:	Low leakage
Bushings:	Bronze Oilite
Leakage:	Class 2 - 10 cfm/ft ² @ 1" w.g. (3 cmm/m ² @ .25 kPa)

ELECTRICAL

24 Volt, 3 VA, 45 in lbs, 2-10 VDC Modulating Actuator