

QEL Q4C Series Digital Controller

The Q4C is a multi-channel controller display and alarm unit that utilizes digital communications to interface with a maximum of four remote digital QEL transmitter/sensors. These are used to measure a wide variety of toxic gases such as CO, NO₂, NH₃, H₂S, SO₂, Refrigerants, and Combustibles. The RS-485 communication is connected via a 4-wire multidrop daisy chain configuration to reduce the overall installation costs of the system. Alarm setpoints are set through the front keypad or through QEL supplied software that is downloaded to the controller from a PC or laptop computer. Common relay configurations include voting, averaging, delay on actuation and de-actuation, normally or not-normally energized and latching. The audible alarm has three buzzer settings, continuous, intermittent and double-tap intermittent. An additional feature includes 24 VDC transistor outputs for a horn and strobe. Available options are a four SPDT relay board, an analog output board that features 4-20 mA, or 2-10 VDC outputs assignable as averaging or peak mode, and an RS-485 output board to communicate with our powerful M-CONTROLLER forty input controller. Each controller comes standard with a 2 x 8 character back-lit display, key pad, software CD and interface cable.



TRANSMITTER/SENSOR WIRING

The Q4C controller provides a serial port for digital communication with QEL transmitter/sensors. A maximum of four sensors can be arranged in any gas configuration to this port. From this port, four wires are connected to the first sensor, from this sensor to the next sensor, and so forth in a daisy chain arrangement. Two of the wires are for power, and two are used for the digital communications. This arrangement reduces the amount of wire, conduit and conduit size, providing for a significant installation cost reduction. Equally the Q4C controller provides additional options such as a relay output board, an analog output board, and an RS-485 board. QEL Engineering can review a proposed system layout and provide recommendations to optimize cost reduction efforts.

MODEL NUMBER ORDERING CODE

Q 4 C - X - [] [] [] []

Revision
(Factory Provided)

Options*
(Enter 0 for display unit only)

Relay Board R
4 x SPDT, 10 Amps

Analog Board..... T
Isolated 4-20 mA or 2-10 VDC output

RS-485 Board 4
Isolated to communicate with M-CONTROLLER

* Maximum of two option boards only




QUATROSENSE
ENVIRONMENTAL
LIMITED



Tel: 613-838-4005
www.QELsafety.com

QEL Q4C Series Digital Controller

Physical Dimensions:

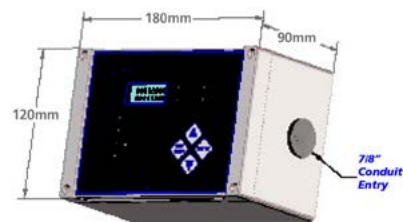

Installation Holes:

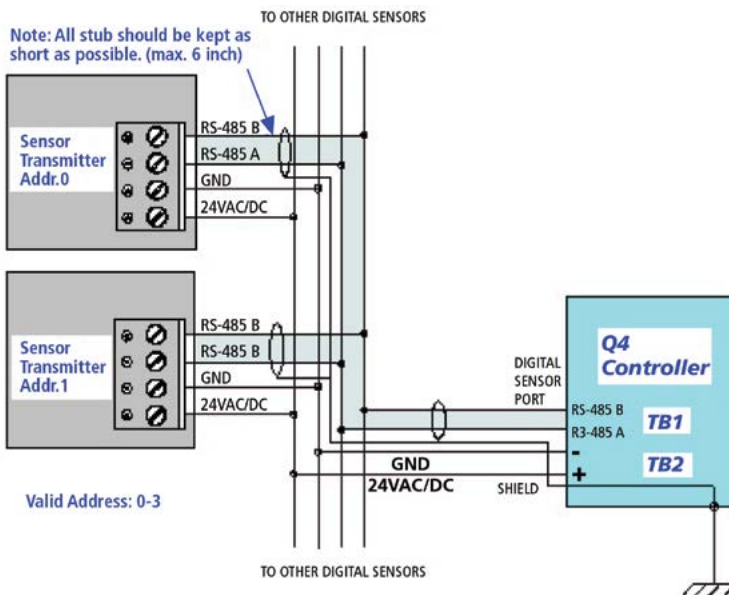

ELECTRICAL AND MECHANICAL SPECIFICATIONS

Input Power:	24V +/- 4V AC or DC
Fuse:	F1: 4A slo-blo. F2: 1A very fast
Enclosure:	NEMA 4X Type General Purpose
Enclosure Material:	ABS plastic
Dimensions:	7" X 4.7" X 3.5" (180 X 120 X 90 mm)
Temperature:	Industrial -20° to +50° C (-4° to +122° F)
Humidity:	Continuous 5 to 95% RH, non-condensing Intermittent 0 to 99% RH, non-condensing
Input Types:	RS-485 digital port for up to 4 QEL transmitter/sensors. RS-232 programming port using RJ-11 connector
Output Ports:	RS-485 to host M-CONTROLLER RS-232 programming port using RJ-11 connector 4-20 mA signals scalable
LED Status Lights:	TX/RX ▶ Relay 1 ▶ Relay 2 ▶ Relay 3 ▶ Relay 4

Recommended Cable:	Power - Twisted shielded pair Communication (RS-485) - Belden 9841 or equivalent twisted shielded pair, 120 ohm
Panel Controls:	4 tactile and audible keypad
Audio Indicator:	24 VDC transistor outputs, buzzer, strobe, horn
Relay Outputs:	4 SPDT rated 10 Amps resistive 250 VAC / 30 VDC
Relay Assignment:	Independent, individually set to one or all transmitter/sensors
Time Delays:	Individually set, make, break, average, and voting, 0 to 59 minutes
LCD Digital Display:	2 x 8 back-lit LCD displaying transmitter address, gas type, concentration and alarm status
Display Scroll Rate:	Adjustable 1 - 9 seconds
Power Supply Output:	24V supplied externally through controller

Ensure a complete understanding of all applicable Federal, State, Provincial and Local Health and Safety laws and regulations before using these products.



QUATROSENSE
ENVIRONMENTAL
LIMITED

5935 Ottawa Street, Richmond, Ontario, Canada K0A 2Z0
Phone: 1.613.838.4005 Fax: 1.613.838.4018
Email: QEL@QELsafety.com www.QELsafety.com

This brochure includes general specifications which are subject to change.